

### Electrical Features

- Trench/Fieldstop IGBT
- $V_{CEsat}$  with positive Temperature Coefficient
- Low  $V_{CEsat}$

### Typical Applications

- Auxiliary inverters
- Motor drives
- Servo drives



### Mechanical Features

- High power density
- Integrated NTC temperature sensor
- Copper base plate
- Solder contact technology
- Standard housing

### IGBT, Inverter

| Maximum Rated Values   |                                      |   |                       |      |      |          |   |
|------------------------|--------------------------------------|---|-----------------------|------|------|----------|---|
| Symbol                 | Item                                 | Conditions  | Rating                | Unit |      |          |   |
| IGBT                   |                                      |   |                       |      |      |          |   |
| $V_{CES}$              | Collector-emitter voltage            | $T_{vj}=25^{\circ}C$                                    | 1200                  | V    |      |          |   |
| $V_{GES}$              | Gate-emitter voltage                 | -   | $\pm 20$              | V    |      |          |   |
| $I_C$                  | Collector current,DC                 | $T_C=100^{\circ}C, T_{vj}=175^{\circ}C$                 | 150                   | A    |      |          |   |
| $I_{CRM}$              | Repetitive peak collector current    | $t_p=1ms$   | 300                   | A    |      |          |   |
| $P_{tot}$              | Total power dissipation              | $T_C=25^{\circ}C, T_{vj}=175^{\circ}C$                  | 750                   | W    |      |          |   |
| Characteristics Values |                                      |   |                       |      |      |          |   |
| Symbol                 | Item                                 | Conditions  | Values                |      |      | Unit     |   |
|                        |                                      |   | Min.                  | Typ. | Max. |          |   |
| $I_{CES}$              | Collector-emitter cut-off current    | $V_{CE}=1200V, V_{GE}=0V, T_{vj}=25^{\circ}C$           | -                     | -    | 1    | mA       |   |
| $I_{GES}$              | Gate leakage current                 | $V_{CE}=0V, V_{GE}=20V, T_{vj}=25^{\circ}C$             | -                     | -    | 100  | nA       |   |
| $V_{GE(th)}$           | Gate-emitter threshold voltage       | $I_C=5.7mA, V_{CE}=V_{GE}, T_{vj}=25^{\circ}C$          | 5.2                   | 5.79 | 6.2  | V        |   |
| $V_{CEsat}$            | Collector-emitter saturation voltage | $I_C=150A$<br>$V_{GE}=15V$                              | $T_{vj}=25^{\circ}C$  | -    | 1.89 | -        | V |
|                        |                                      |   | $T_{vj}=125^{\circ}C$ | -    | -    | -        |   |
|                        |                                      |   | $T_{vj}=150^{\circ}C$ | -    | -    | -        |   |
| $C_{ies}$              | Input capacitance                    | $V_{CE}=25V, V_{GE}=0V$<br>$f=1MHz, T_{vj}=25^{\circ}C$ | -                     | 10.6 | -    | nF       |   |
| $C_{oes}$              | Output capacitance                   |   | -                     | 0.69 | -    |          |   |
| $C_{res}$              | Reverse transfer capacitance         |   | -                     | 0.36 | -    |          |   |
| $Q_G$                  | Gate charge                          | $V_{GE}=-15...+15V, T_{vj}=25^{\circ}C$                 | -                     | -    | -    | $\mu C$  |   |
| $R_g$                  | Internal gate resistance             | $T_{vj}=25^{\circ}C$                                    | -                     | 1.2  | -    | $\Omega$ |   |

|              |  |  |                      |       |     |            |    |
|--------------|--|--|----------------------|-------|-----|------------|----|
| $t_{d(on)}$  | Turn-on delay time                     | $V_{CC}=600V$<br>$I_C=150A$<br>$V_{GE}=\pm 15V$<br>$R_{G(on)}=1.6\Omega$<br>$R_{G(off)}=1.6\Omega$ | $T_{vj}=25^\circ C$  | -     | 258 | -          | ns |
|              |  |  | $T_{vj}=125^\circ C$ | -     | -   | -          |    |
|              |  |  | $T_{vj}=150^\circ C$ | -     | -   | -          |    |
| $t_r$        | Rise time                              |  | $T_{vj}=25^\circ C$  | -     | 49  | -          |    |
|              |  |  | $T_{vj}=125^\circ C$ | -     | -   | -          |    |
|              |  |  | $T_{vj}=150^\circ C$ | -     | -   | -          |    |
| $t_{d(off)}$ | Turn-off delay time                    |  | $T_{vj}=25^\circ C$  | -     | 340 | -          |    |
|              |  |  | $T_{vj}=125^\circ C$ | -     | -   | -          |    |
|              |  |  | $T_{vj}=150^\circ C$ | -     | -   | -          |    |
| $t_f$        | Fall time                              |  | $T_{vj}=25^\circ C$  | -     | 183 | -          |    |
|              |  |  | $T_{vj}=125^\circ C$ | -     | -   | -          |    |
|              |  |  | $T_{vj}=150^\circ C$ | -     | -   | -          |    |
| $E_{on}$     | Turn-on energy (per pulse)             | $T_{vj}=25^\circ C$  | -                    | 2.96  | -   | mJ         |    |
|              |  | $T_{vj}=125^\circ C$   | -                    | -     | -   |            |    |
|              |  | $T_{vj}=150^\circ C$   | -                    | -     | -   |            |    |
| $E_{off}$    | Turn-off energy (per pulse)            | $T_{vj}=25^\circ C$  | -                    | 10.26 | -   |            |    |
|              |  | $T_{vj}=125^\circ C$   | -                    | -     | -   |            |    |
|              |  | $T_{vj}=150^\circ C$   | -                    | -     | -   |            |    |
| SC data      | Short-circuit current                  | $V_{CC}=600V, V_{GE}\leq 15V, T_{vj}=150^\circ C$<br>$V_{CES}\leq 1200V, t_p\leq 10\mu s$          | -                    | 1230  | -   | A          |    |
| $R_{thJC}$   | Thermal resistance, junction to case   | Per IGBT   | -                    | -     | 0.2 | K/W        |    |
| $R_{thCH}$   | Thermal resistance, case to heatsink   | Per IGBT $\lambda_{grease}=1W/(m\cdot K)$  | -                    | 0.082 | -   | K/W        |    |
| $T_{vjop}$   | Temperature under switching conditions |  | -40                  |       | 150 | $^\circ C$ |    |

**Diode, Inverter**

**Maximum Rated Values**

| Symbol    | Item                            | Conditions                             | Rating | Unit   |
|-----------|---------------------------------|--|--------|--------|
| $V_{RRM}$ | Repetitive peak reverse voltage | $T_{vj}=25^\circ C$                    | 1200   | V      |
| $I_F$     | Forward current, DC             |  | 150    | A      |
| $I_{FRM}$ | Repetitive peak forward current | $t_p=1ms$                              | 300    | A      |
| $I^2t$    | $I^2t$ -value                   | $V_R=0V, t_p=10ms, T_{vj}=150^\circ C$ | 2950   | $A^2s$ |

**Characteristic Values**

|          |                                 |                             |                      |       |      |         |    |
|----------|---------------------------------|-----------------------------|----------------------|-------|------|---------|----|
| $V_F$    | Continuous forward voltage      | $I_F=150A$<br>$V_{GE}=0V$   | $T_{vj}=25^\circ C$  | -     | 1.98 | -       | V  |
|          |                                 |                             | $T_{vj}=125^\circ C$ | -     | -    | -       |    |
|          |                                 |                             | $T_{vj}=150^\circ C$ | -     | -    | -       |    |
| $I_{RM}$ | Peak reverse recovery current   |                             | $T_{vj}=25^\circ C$  | -     | 168  | -       | A  |
|          |                                 |                             | $T_{vj}=125^\circ C$ | -     | -    | -       |    |
|          |                                 |                             | $T_{vj}=150^\circ C$ | -     | -    | -       |    |
| $t_{rr}$ | Reverse recovery time           | $V_R=600V$                  | $T_{vj}=25^\circ C$  | -     | 152  | -       | ns |
|          |                                 | $I_F=150A$<br>$V_{GE}=-15V$ | $T_{vj}=125^\circ C$ | -     | -    | -       |    |
|          |                                 |                             | $T_{vj}=150^\circ C$ | -     | -    | -       |    |
| $Q_r$    | Repetitive peak forward current | $T_{vj}=25^\circ C$         | -                    | 12.89 | -    | $\mu C$ |    |
|          |                                 | $T_{vj}=125^\circ C$        | -                    | -     | -    |         |    |
|          |                                 | $T_{vj}=150^\circ C$        | -                    | -     | -    |         |    |

|                   |  |   |                        |       |       |     |    |
|-------------------|--|---|------------------------|-------|-------|-----|----|
| E <sub>rec</sub>  | Recovered charge                       |   | T <sub>vj</sub> =25°C  | -     | 8.36  | -   | mJ |
|                   |  |   | T <sub>vj</sub> =125°C | -     | -     | -   |    |
|                   |  |   | T <sub>vj</sub> =150°C | -     | -     | -   |    |
| R <sub>thJC</sub> | Thermal resistance, junction to case   | per diode                                   | -                      | -     | 0.375 | K/W |    |
| R <sub>thCH</sub> | Thermal resistance, case to heatsink   | per diode, λ <sub>grease</sub> =1 W/(m • K) | -                      | 0.155 | -     | K/W |    |
| T <sub>vjop</sub> | Temperature under switching conditions |   | -40                    |       | 150   | °C  |    |

Note:

IGBT electrical characteristics according to IEC 60747 – 9

Diode electrical characteristics according to IEC 60747 – 2


**NTC Thermistor Characteristics**

| Symbol              | Item                    | Conditions   | Values |      |      | Unit |
|---------------------|-------------------------|--|--------|------|------|------|
|                     |                         |  | Min.   | Typ. | Max. |      |
| R <sub>25</sub>     | Rated resistance        | T <sub>C</sub> =25°C   | -      | 5    | -    | kΩ   |
| ΔR/R                | Deviation of resistance | T <sub>C</sub> =100°C,R <sub>100</sub> =493Ω   | -5     | -    | 5    | %    |
| P <sub>25</sub>     | Power dissipation       | T <sub>C</sub> =25°C   | -      | -    | 20   | mW   |
| B <sub>25/50</sub>  | B-constant              | R <sub>2</sub> =R <sub>25</sub> exp[B <sub>25/50</sub> (1/T <sub>2</sub> -1/(298.15K))]  | -      | 3375 | -    | K    |
| B <sub>25/80</sub>  | B-constant              | R <sub>2</sub> =R <sub>25</sub> exp[B <sub>25/85</sub> (1/T <sub>2</sub> -1/(298.15K))]  | -      | 3411 | -    |      |
| B <sub>25/100</sub> | B-constant              | R <sub>2</sub> =R <sub>25</sub> exp[B <sub>25/100</sub> (1/T <sub>2</sub> -1/(298.15K))] | -      | 3433 | -    |      |


**Module**

| Symbol              | Item                           | Conditions                                | Rating  |      |      | Unit |
|---------------------|--------------------------------|---|---------|------|------|------|
| V <sub>ISOL</sub>   | Isolation voltage              | Terminals to baseplate, RMS,f=50Hz,t=1min | 2500    |      |      | V    |
| T <sub>vj max</sub> | Maximum junction temperature   | -   | 175     |      |      | °C   |
| T <sub>vj op</sub>  | Operating junction temperature | Continuous operationg(underswitching)     | -40~150 |      |      | °C   |
| T <sub>stg</sub>    | Storage temperature            | -   | -40~125 |      |      | °C   |
| Symbol              | Item                           | Conditions                                | Values  |      |      | Unit |
|                     |                                |   | Min.    | Typ. | Max. |      |
| M                   | Mountingtorqueformodulmounting | -   | 3       | -    | 6    | Nm   |
| ds                  | Creepage distance              | Terminal to terminal                      | -       | -    | -    | mm   |
|                     |                                | Terminal to base plate                    | -       | 10   | -    |      |
| da                  | Clearance                      | Terminal to terminal                      | -       | -    | -    | mm   |
|                     |                                | Terminal to base plate                    | -       | 7.5  | -    |      |
| m                   | Weight                         | -   | -       | 290  | -    | g    |

**Circuit Diagram**

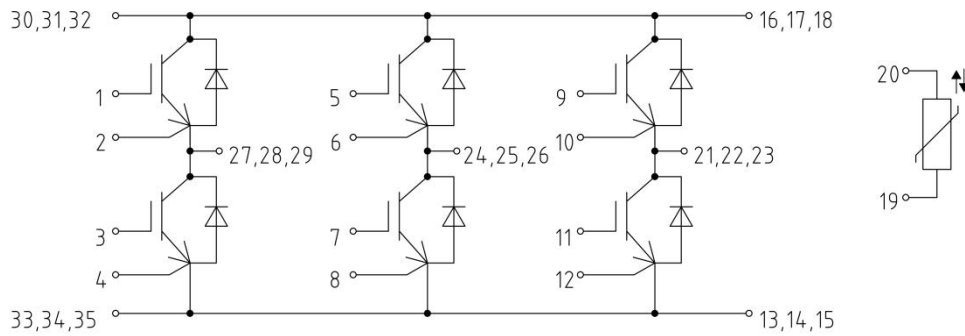

**Package Outlines**

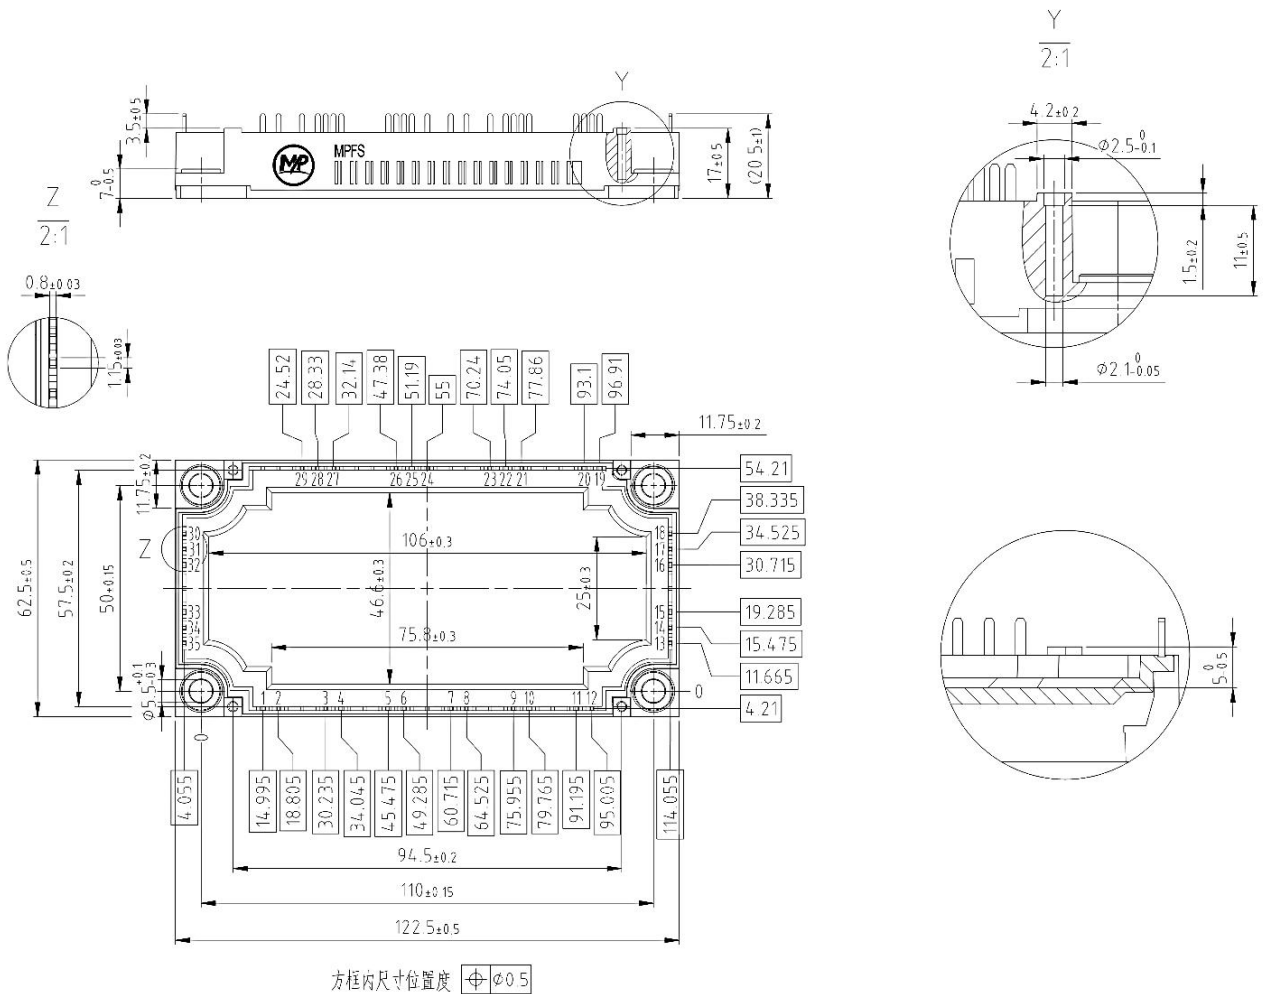

## **Terms & Conditions of usage**

- 1.The product specifications, characteristics, data, materials and structures given in this datasheet are subject to change without notice.
- 2.The information given in this datasheet shall in no event be regarded as a guarantee of conditions or characteristics. Marching-Power Technology Co., Ltd. does not warrant or assume any legal liability or responsibility for the accuracy and completeness of any examples, hints or any typical values stated herein and/or any information regarding the application of the product.
- 3.This datasheet is only used as a reference for customers to apply our products, Marching-Power Technology Co., Ltd. does not undertake to permit the use of intellectual property rights or any third-party property rights related to the product information described in this datasheet.
- 4.Although Marching-Power Technology Co., Ltd. is committed to enhancing product quality and reliability, all semiconductor products still have a probability of failure. When using Marching-Power semiconductor products in your equipment, you are requested to take adequate safety measures to prevent the equipment from causing accidents or events including but not limited to physical injury, fire or damage to other property if any of the products become faulty.
- 5.The products introduced in this datasheet are electrostatic sensitive devices and must be protected against static electricity during device installation, testing, packaging, storage and transportation.
6. Due to technical requirements our product may contain dangerous substances. For information on the types in question please contact the sales office, which is responsible for you.
- 7.Do not use the products introduced in this datasheet in equipment or systems that requiring strict reliability or/and may directly endanger human life such as medical, life-saving, life-sustaining, space equipment, aeronautic equipment, nuclear equipment submarine repeater equipment and equivalents to strategic equipment (without limitation).
- 8.No part of this datasheet may be disseminated and reproduced in any form or by any means without prior written permission from Marching-Power Technology Co., Ltd.
- 9.The data contained in this datasheet is exclusively intended for use by professional technicians only. It is the responsibility of the customer's own technical departments to evaluate the suitability of the product for the intended application and the completeness of the product information given in this document with respect to corresponding application. If you have any question about any portion in this datasheet, contact Marching-Power Technology Co., Ltd. before using the product. Marching-Power Technology Co., Ltd. shall not be liable for any injury caused by any use of the products not in accordance with instructions set forth herein.